

KV 8091/92 4x4 Pocket Door™ Slide

- 75 lb. class
- rack & pinion system



The Knape & Vogt 4x4

Pocket Door™ Slide is
ideal for use in large
entertainment and home
theater cabinets. It is
specially designed to
hold over-size doors up
to 75 pounds and 72




inches in height. The 4x4 Pocket Door Slide's dual rack and pinion system virtually eliminates door sag, speeding installation, minimizing adjustment and eliminating callbacks. As with all Knape & Vogt drawer slides, the 4x4 Pocket Door™ Slide is designed to meet or exceed ANSI performance standards as established by BIFMA, BHMA and KCMA.

KEY PRODUCT FEATURES

- Dual rack and pinion system virtually eliminates door sag.
- 75–Pound Class rated for heavy-duty applications.
- Maximum door dimensions: 72"h x 26"w
- Innovative indexing pin allows door slide to nest within door rack for easy alignment and installation.
- Self-closing, three-way adjustable isometric door hinge.

- Hinge bases are pre-mounted on the 8092 for faster installation.
- 8091 allows installer to use the hinge/hinge base of their choice.
- Precision steel ball bearings provide smooth and quiet operation.
- Backed by the exclusive Knape & Vogt Limited Lifetime Warranty.

DIMENSIONS

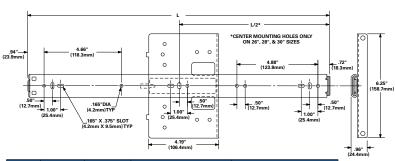

Size		L/2*	Approx. Door Conceal**	Approx. Cabinet Depth***		
12"	12-1/8"	_	8"	12-3/8"		
13"	13-18"	_	9"	13-3/8"		
14"	14-1/8"	_	10"	14-3/8"		
15"	15-1/8"	_	11"	15-3/8"		
16"	16-1/8"	_	12"	16-3/8"		
18"	18-1/8"	_	14"	18-3/8"		
20"	20-1/8"	_	16"	20-3/8"		
22"	22-1/8"	_	18"	22-3/8"		
24"	24-1/8"	_	20"	24-3/8"		
26"	26-1/8"	13-1/16"	22"	26-3/8"		
28"	28-1/8"	14-1/16"	24"	28-3/8"		
30"	30-1/8"	15-1/16"	26"	30-3/8"		

- Center mounting holes only on 26",28", & 30" sizes
- Door fully retracted into case
- *** Add thickness of door to determine minimum

SPECIFICATIONS

name 8091/92 4x4 Pocket Door™ Slide

mounting Mounts directly to cabinet side.

load rating 75-Pound Class

max. door 72"h x 26"w dimensions

finish Ebony Black (EB)

action Progressive movement on precision steel ball bearings.

additional features

- Rack and pinion design virtually eliminates door sag.
- Slide rack indexing system speeds installation time.
 - Metal ball retainer holds three bearings per inch of race for smooth and quiet operation.
 - Multiple hinge options allow for a wide variety of applications.


sizes 8092: 12", 13", 14", 15", 16", 18", 20", 22", 24", 26", 28" and 30".

8091: 12", 13", 14", 15", 16"18", 20", 22", 24", 26", 28" and 30".

packaged Poly Pack (8092P): 1 set per poly pack w/screws and instructions. Model comes with attached hinge bases. Hinges and pinion shafts must be ordered separately

> Poly Pack (8091P): 1 set per poly pack w/screws and instructions. Shafts must be ordered separately. Hinges and hinge bases supplied by installer.

NSTALLATION

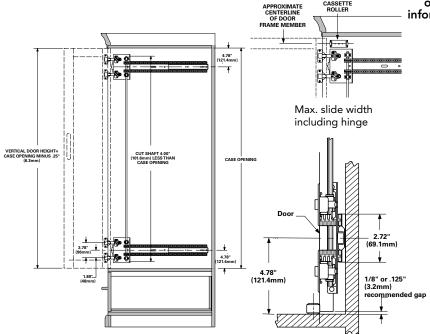

ordering information

8092P EB 12, 13, 14, 15, 16, and 18-30" Slides: 8091P EB 12, 13, 14, 15, 16, and 18-30"

<u>Packed</u> EB 36" Shafts: 8092SB 1 pair 8092SB EB 48" pair 1 72" 8092SB EΒ pair EB 36" 8090B 10 each EB 48" 8090B 10 each 8090B EΒ 72" 10 each

Hinge Kits <u>Hinge Pack</u> Hinges: (2 hinges w/screws) (40 hinges w/o screws) 8080 HKEZSEB 8080 HPEZSEB Standard: Free-Swing: 8080 HKEZFEB 8080 HPEZFEB Overlay Dr.: 8080 HPEZLEB 8080 HKEZLEB Thick Dr.: 8085 HKEZTEB 8085 HPEZTEB Ex. Thick Dr.: 8086 HKEZXEB 8086 HPEZXEB

Raised Panel

Door Roller: 8090P CR (1 each w/screws)

NOTE: Consult price list or KV Customer Service for stock avaiability information on different sizes, packages and finishes.

The 4x4 Pocket Door[™] Slide is designed to be mounted to the side of a cabinet for pocket door wood applications in the 75-pound class. Not recommended for receding or flipper door applications.

NOTE: Not recommended for square doors or where door width is greater than door height.

Hinge Options	Hinge Description	Door Thickness	Edge Bore* Distance	Hinge Cup Bore Dia.	Hinge Cup Bore Depth	Max. Slide Width, including hinge, for Partition Installations	Partial Overlay					
8080	Standard Hinge	3/4" [19mm]	1/4" [6mm]	1-38" [35mm]	11.8mm	1-25/32" [45.2mm]	N/A					
8080FS	Standard Hinge w/ Free Swing Knuckle	3/4" [19mm]	1/4" [6mm]	1-3/8" [35mm]	11.8mm	1-25/32" [45.2mm]	N/A					
8080L	Overlay Door	3/4" [19mm]	3/8" [9.5mm]	1-37/64" [40mm]	13.2mm	1-25/32" [45.2mm]	1/4" [6.3mm]					
8085	Thick Door	1" [25.4mm]	5/16" [8mm]	1-37/64" [40mm]	13.2mm	2-5/32" [54.8mm]	N/A					
8086	Extra Thick Door	1-1/4" [32mm]	1/2" [12.7mm]	1-37/64" [40mm]	13.2mm	2-15/32" [61.9mm]	N/A					
*Edge bore	Edge bore distances shown are approximate. Always bore a test block to verify hinge cup locations.											

Knape & Vogt reserves the right to change product specifications at any time without notice and without incurring responsibility for existing units